

TM-2-7A-PB0

Torque Motor



Electrical specifications

Winding code : PB0	Symbol	Unit	Water cooling
Continuous torque	T_c	Nm	569
Continuous current	I_c	A_{rms}	20.5
Stall torque	T_s	Nm	468
Stall current	I_s	A_{rms}	16.4
Peak torque(for 1sec.)	T_p	Nm	1140
Peak current(for 1sec.)	I_p	A_{rms}	56
Torque constant	K_t	Nm/Arms	29.62
Electrical time constant	T_e	ms	7
Resistance (line to line at 25°C)	R_{25}	Ω	4.5
Inductance (line to line)	L	mH	31.4
Number of poles	2p		44
Back emf constant (line to line)	K_v	Vrms/rad/s	17.1
Motor constant (at 25°C)	K_m	Nm/ $\sqrt{W}$	11.42
Thermal resistance	R_{th}	K/W	0.037
Thermal sensor			PTC SNM100+SNM130+Pt1000
Max. DC BUS		V_{DC}	750
Inertia of rotor	J	kgm^2	0.081
Thermal time constant	T_{th}	s	120
Max. continuous power dissipation	P_c	W	4002
Max. peak power dissipation	P_p	W	29870
Rated speed(at 600VDC)		rpm	147



Mechanical specifications

	Symbol	Unit	Water cooling
Mass of rotor	M_r	kg	7.1
Mass of stator	M_s	kg	28.9
Height of stator	H_s	mm	150
Height of rotor	H_r	mm	101
Length of rotor centring fit	H	mm	15
Water temperature difference for P_c	$\Delta\theta$	K	5
Minimum water flow	q	l/min	11.5
Max. pressure drop	Δp	bar	1

T-N curve

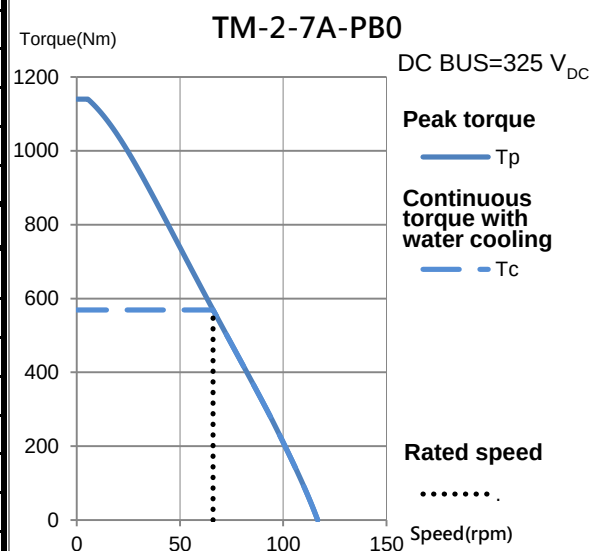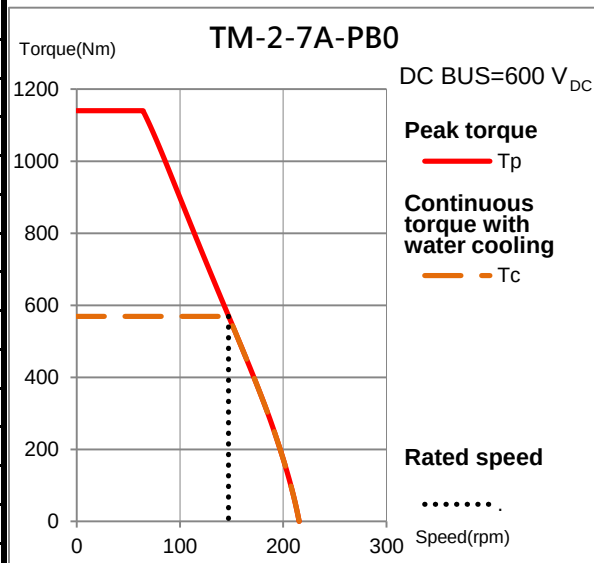

#REF!

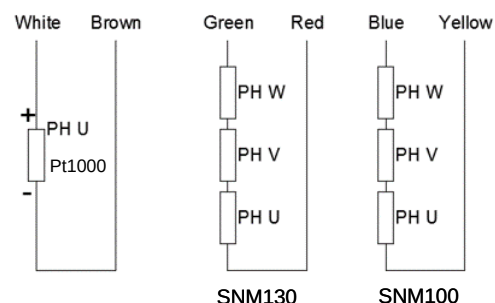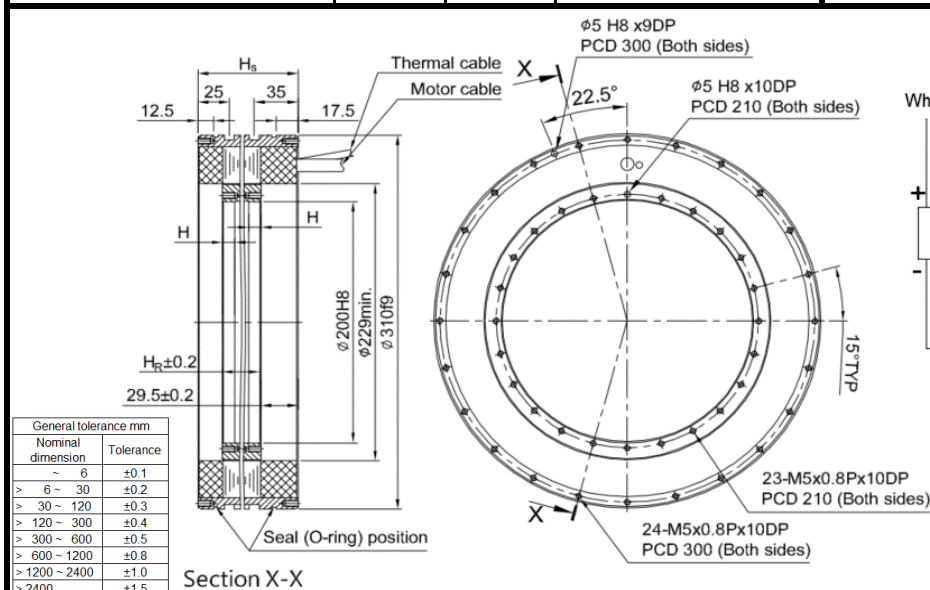

Motor wire table		
Color or wire no.	Signal	
U/L1	PH U	
V/L2	PH V	
W/L3	PH W	
Green/Yellow	GND	

Except dimensions, all the specifications in the table are in $\pm 10\%$ of tolerance

Version: 2.00

This drawing is only for reference, detail dimensions please refer to approval drawing.

Date: 2020/10/23